

TRIS HYDRAULIC REACH MOWERS FOR TRACTORS WITH REVERSIBLE DRIVE OR FRONT PTO



Floating head system



"OVERLAP" spiral rotor with two spiral rows



Oil cooler with thermostat




Monolever electric control

HP Tractor →	90	100	110	Min. tractor weight Kg	Min. tractor width m
TST50 Tris				3200	2,10

Working positions (m)

		TST TN100
A	m	4,84
B	m	2,37
C	m	2,75
D	m	2,21
E	m	4,73

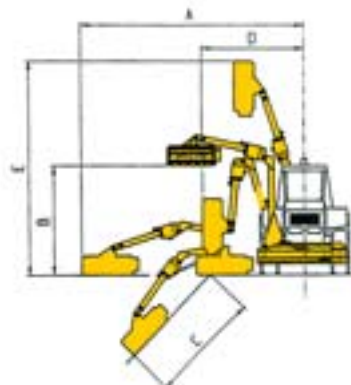

Technical data

Model	Max horizontal reach* m	Weight Kg	Oil l	Rotor rpm	Pto MAX rpm	Flail head angle
TST50 Tris TN100	4,84	910	130	2.800	540**/1.000***	190°

* Reach measured from tractor centre line to head edge

** Reversible drive version

*** Front version



Machines with electric controls "Electra"

Model

TST50-100 Tris Plus with TN100 flail head m 1,00

Loader Version
For mounting on earth moving machinery please report to specific Price List.



Equipped with:

- Flail head
- Totally independent hydraulic system (gear pump and motor)
- Floating head system
- Hydraulic break-back with accumulator controlled autoreset facility
- Oil cooler with thermostat
- Lift float
- Automatic kit for arm's overturn
- 3 point linkage attachments
- Front and rear abrasion resistant guard for flail head
- Oil and pto shaft

Flail head

	TN100
Width of cut (m)	1,00
Rotor speed (rpm)	3000
Blade tip speed (m/sec)	60
Flail head angle	190°
Weight (kg)	265



TN100
Direct Drive

Flails

TN100

Interchangeable on the same rotor

Multise "Y" and straight blades for: grass, bushes, shrubs, sticks
Ø max 4 cm



"T" Hammer blades for: wood
Ø max 5 cm



Code 0901003
Code 0901148

Code 0901141

n° 28 + 14

n° 14

Standard

IT IS RECOMMENDED that the connection between tractor and Hydraulic flail mowers and its setting up should be made with the Dealer according the instructions and warnings listed on our Use and Maintenance Manual. For further information please contact our after sales service.

Warning:

- Front version is available for front pto's with 1.000 rpm counterclockwise.